

Model No.: R10.../ R6...

Description: Rotary Cam Switch with flange, 10A/6A



Salient Features:

- Quick installation
- Safe operation
- Robust design
- Wide application e.g. elevator industries, motor control, automation, machineries etc
- Standard & Customized legends possible
- Optimum performance
- Choice of multiposition/multiple circuits

General Characteristics:

It's a manual cam operated control switch assembled on packet principle with wide application in electrical, electronics & instrumentation equipments. It is available with minimum one & maximum six packets. Different cams are used for making breaking depending upon contact sequence. The Cam, which closes and opens the contacts, has rotary movement to multiple positions, thereby multiple Circuit functions can be controlled. Further, the flexibility in the switch type selection covering various current /voltage ratings and options to select the number of contacts, is added advantage. This ensures that a right switch is chosen for the desired application. Rotary Cam Switches thus offer complete design flexibility to assemble complex switching programs, contact ratings and customize all switching applications. It is suitable for AC switching applications.

Construction:

Each packet has two sets of double break silver nickel contact for effective making & breaking. Packets are made from insulating material that can withstand mechanical & electrical stresses & have excellent electrical properties.


Switching angle: It is used to perform Make and Break operation in a sequential way by rotating the switch to different positions. Switching angle 30, 45 90 are available depending upon number of positions.

Mounting: Available in panel mounting version. Fixing centers are: 36X36 & 25X30

Warranty: 18/12 month from the date of supply/uses, whichever is earlier.

Available types		: Available in momentary, stay put & combination of momentary & stay put. Also available without flange. Flange available in yellow, grey, black & silver. Knobs available in regular & extended type in red & black.
Degree of protection		: IP40 as per IEC 60529 : IP65 as per IEC 60529 with Gasket provided on request
Degree of Pollution		: 3
Applicable standards		: IEC 60947-3 : IEC 60204-1
Product Certification		: As per IEC 60947-3

Mechanical Characteristics:

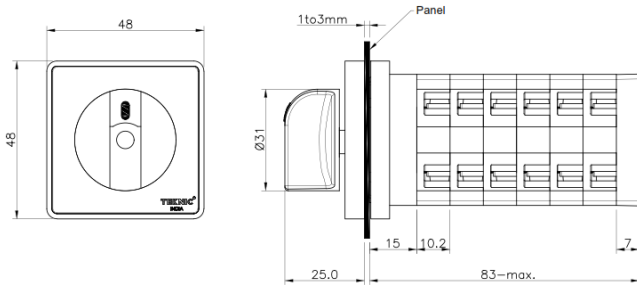Function indicator		: Arrow indication on the knob : Marking on Legend plates (customized available on request)
Terminal Capacity		: Maximum 2 X 0.75mm ² : Minimum 1 X 0.5 mm ²
Terminal marking		:
Terminal Torque	Nm	: 0.8
Contact material		: Brass (for regular applications) : Contact material for Low voltage/Low Current options available on request
Operation		: Slow break (NO/NC)
Operating torque	Nm	: 11
Operating force	N	: NA
Positive operation Conforming to IEC/EN 60947-5-1 Appendix K		: All functions incorporating a NC contact are positive opening operation
Operating travel	mm	: NA
Mechanical life		: 2,00,000 operations
Ambient	°C	: -25 to +70
Storage	°C	: -25 to +40
Overall Dimensions with sketch (LXBXH)	mm	: 
Vibration resistance Conforming to IEC 60068-2-6	Hz	: Pending
Shock resistance Conforming to IEC 60068-2-27		: Pending
Viewing Angle	°	NA
Optical Axial intensity	mcd	NA
Weight	gms	80

Electrical Characteristics of contacts:

Make & Break Capacity		Utilization category	AC21
		Rating	10A 3phase 415V 10A
Rated insulation voltage	V		: 500
Rated thermal current	A		: 12
Low power application			: Low voltage/Low Current options for infrequent applications available on request (<25mA)
Short circuit protection			: NA
Dielectric Test	KV		: 2.5
Approvals regarding the part:			: as per IEC 60947-3
Approvals regarding the material			
Polymeric parts			: UL-Recognized material
Rated Impulse Withstand			: NA
Polarity protection			: NA
Current Consumption	mA		: NA
Electrical Endurance			: at rated current over 50000 operations

Accessories & codes:

NA

Ordering codes

The ordering code for each product is mentioned in the Catalogue/Data Sheet and not indicated on each product because of the various combinations possible it becomes practically impossible to do so. However the primary packing box always mentions the ordering code of the material it holds.

E.g. R10-A12300-Y


<u>R10-</u> ↓	<u>A</u> ↓	<u>1</u> ↓	<u>2</u> ↓	<u>3</u> ↓	<u>00</u> ↓	<u>-Y</u> ↓																																													
Rotary Cam Switch 10A Can be R6 for 6 Amp	Number of Ways	Number of poles per position	Number of discs	Degree of rotation	Combinations of Legends & Functions Refer CH: QA: 87	Knob plate combination																																													
	A= 1 Way B= 2 Way C= 3 Way D= 4 Way E= 5 Way F= 6 Way G= 7 Way H= 8 Way J= 9 Way K= 10 Way L= 11 Way M= 12 Way R=Ammeter V=Voltmeter			3=30° with OFF 4=45° with OFF 6=60° with OFF 9=90° with OFF T=30° NO OFF F=45° NO OFF S=60° NO OFF N=90° NO OFF		<table border="1"> <thead> <tr> <th>Code</th> <th>Knob</th> <th>Plate</th> </tr> </thead> <tbody> <tr><td>R</td><td>Regular Red</td><td>No plate</td></tr> <tr><td>B</td><td>Regular Black</td><td>No plate</td></tr> <tr><td>Y</td><td>Regular Red</td><td>Yellow</td></tr> <tr><td>K</td><td>Regular Black</td><td>Black</td></tr> <tr><td>G</td><td>Regular Black</td><td>Grey</td></tr> <tr><td>S</td><td>Regular Black</td><td>Silver</td></tr> <tr><td>L</td><td>Regular Black</td><td>Yellow</td></tr> <tr><td>BY</td><td>Extended Black</td><td>Yellow</td></tr> <tr><td>RY</td><td>Extended Red</td><td>Yellow</td></tr> <tr><td>BB</td><td>Extended Black</td><td>Black</td></tr> <tr><td>BG</td><td>Extended Black</td><td>Grey</td></tr> <tr><td>BS</td><td>Extended Black</td><td>Silver</td></tr> <tr><td>RN</td><td>Extended Red</td><td>No plate</td></tr> <tr><td>BN</td><td>Extended Black</td><td>No plate</td></tr> </tbody> </table>	Code	Knob	Plate	R	Regular Red	No plate	B	Regular Black	No plate	Y	Regular Red	Yellow	K	Regular Black	Black	G	Regular Black	Grey	S	Regular Black	Silver	L	Regular Black	Yellow	BY	Extended Black	Yellow	RY	Extended Red	Yellow	BB	Extended Black	Black	BG	Extended Black	Grey	BS	Extended Black	Silver	RN	Extended Red	No plate	BN	Extended Black	No plate
Code	Knob	Plate																																																	
R	Regular Red	No plate																																																	
B	Regular Black	No plate																																																	
Y	Regular Red	Yellow																																																	
K	Regular Black	Black																																																	
G	Regular Black	Grey																																																	
S	Regular Black	Silver																																																	
L	Regular Black	Yellow																																																	
BY	Extended Black	Yellow																																																	
RY	Extended Red	Yellow																																																	
BB	Extended Black	Black																																																	
BG	Extended Black	Grey																																																	
BS	Extended Black	Silver																																																	
RN	Extended Red	No plate																																																	
BN	Extended Black	No plate																																																	

Mounting Instructions:

Safety regulations: This unit may be installed & commissioned by personnel who are familiar with current regulation for health & safety at work & accident prevention. Ensure local regulations are met especially those relating to safety. Ensure that this Rotary Cam switch will operate fully after installation. Failure to follow these will result in death or serious injury.


Mounting

- : Fixing Centers: 30mm X 25mm Min.
- : Mounting Panel thickness: 1mm to 3mm
- : Fixing Centers: 36mm X 36mm min.




Switch Mounting Details

8 holes - for self threading screw - M3x9 mm

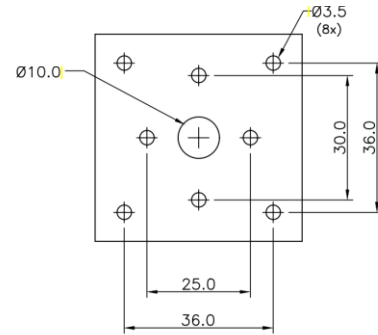

Drilling Plan


Drilling Plan

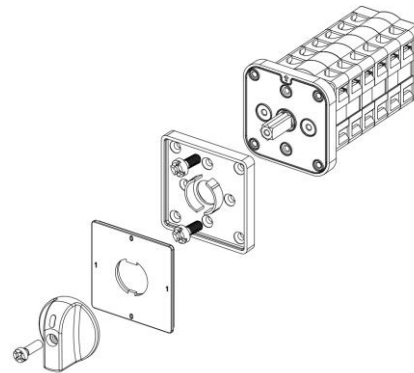


No of elements possible

6 Packets maximum


To install:




Remove the screw on the knob by turning in anticlockwise direction




Remove the knob by pulling it up

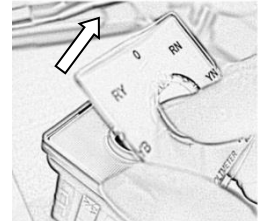


Remove the transparent legend plate taking care of the markings on it




Remove the opaque inner plate




Remove the yellow flush plate




Align the shaft of the rotary switch with the panel hole.

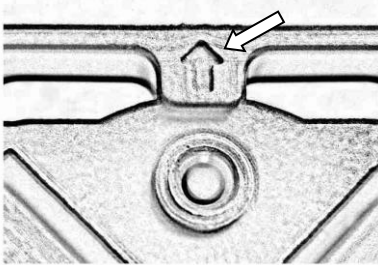


Align the arrow on the rotary cam switch body top position on the panel




Align the arrow of the yellow flush plate with the arrow. Mount the yellow flush plate from above the panel.




Tighten the panel fixing screws provided with the switch as a kit




Alternatively you may use the other four holes for fixing the screws

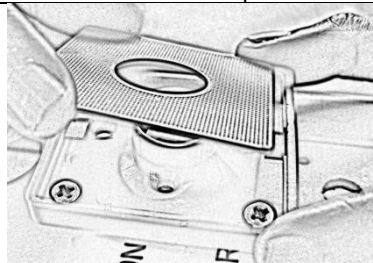


Place the opaque inner plate back on the yellow flush plate




Place the transparent legend plate taking care of the projections provided & the readability of the legends



Place back the selector knob




Tighten the screw of the selector knob in clockwise direction with a torque of 1.2Nm




The unit is ready for wiring


To uninstall:




Remove the wiring. Remove the screw on the knob by turning in anticlockwise direction




Remove the knob by pulling it up




Remove the transparent legend plate taking care of the markings on it



Remove the opaque inner plate



Remove the panel fixing screws




Remove the yellow flush plate

If any more information is required, kindly contact our Marketing Department at +91-22-42532500 or email at ram.talreja@teknico.in


ANNEXURE A


Standard Cam Switches


ON OFF SWITCHES


Description	Poles	Model number 6A	Model number 10A
 <p>ON OFF 2-Position 90°</p>	1	R6-A11939-Y	R10-A11939-Y
	2	R6-A21939-Y	R10-A21939-Y
	3	R6-A32939-Y	R10-A32939-Y
	4	R6-A42939-Y	R10-A42939-Y


CHANGE OVER SWITCHES


Description	Poles	Model number 6A	Model number 10A
 <p>2 Way NO OFF 2-Position 90°</p>	1	R6-B11N40-Y	R10-B11N40-Y
	2	R6-B22N40-Y	R10-B22N40-Y
	3	R6-B33N40-Y	R10-B33N40-Y
	4	R6-B44N40-Y	R10-B44N40-Y


Description	Poles	Model number 6A	Model number 10A
 <p>2 Way with OFF 3-Position 45°</p>	1	R6-B12441-Y	R10-B12441-Y
	2	R6-B22441-Y	R10-B22441-Y
	3	R6-B33441-Y	R10-B33441-Y
	4	R6-B44441-Y	R10-B44441-Y

Description	Poles	Model number 6A	Model number 10A
 <p>3 Way NO OFF 3-Position 45°</p>	1	R6-C12F42-Y	R10-C12F42-Y
	2	R6-C23F42-Y	R10-C23F42-Y
	3	R6-C35F42-Y	R10-C35F42-Y


Description	Poles	Model number 6A	Model number 10A
 <p>3 Way with OFF 4-Position 45°</p>	1	R6-C12443-Y	R10-C12443-Y
	2	R6-C23443-Y	R10-C23443-Y
	3	R6-C35443-Y	R10-C35443-Y

Description	Poles	Model number 6A	Model number 10A
 <p>4 Way NO OFF 4-Position 45°</p>	1	R6-D12F44-Y	R10-D12F44-Y
	2	R6-D24F44-Y	R10-D24F44-Y
	3	R6-D36F44-Y	R10-D36F44-Y


Description	Poles	Model number 6A	Model number 10A
 <p>4 Way with OFF 5-Position 45°</p>	1	R6-D12445-Y	R10-D12445-Y
	2	R6-D24445-Y	R10-D24445-Y
	3	R6-D36445-Y	R10-D36445-Y

Description	Poles	Model number 6A	Model number 10A
	1	R6-E13F46-Y	R10-E13F46-Y
	2	R6-E25F46-Y	R10-E25F46-Y


5 Way NO OFF
5-Position 45°

Description	Poles	Model number 6A	Model number 10A
	1	R6-E13447-Y	R10-E13447-Y
	2	R6-E25447-Y	R10-E25447-Y


5 Way with OFF
6-Position 45°

Description	Poles	Model number 6A	Model number 10A
	1	R6-F13F48-Y	R10-F13F48-Y
	2	R6-F26F48-Y	R10-F26F48-Y


6 Way NO OFF
6-Position 45°

Description	Poles	Model number 6A	Model number 10A
	1	R6-F13449-Y	R10-F13449-Y
	2	R6-F26449-Y	R10-F26449-Y


6 Way with OFF
7-Position 45°

Description	Poles	Model number 6A	Model number 10A
	1	R6-G14F50-Y	R10-G14F50-Y


7 Way NO OFF
7-Position 45°


Description	Poles	Model number 6A	Model number 10A
	1	R6-G14451-Y	R10-G14451-Y


7 Way with OFF
8-Position 45°


Description	Poles	Model number 6A	Model number 10A
	1	R6-H14F52-Y	R10-H14F52-Y


8 Way with NO OFF
8-Position 45°


Description	Poles	Model number 6A	Model number 10A
 <p>8 Way with OFF 9-Position 30°</p>	1	R6-H14353-Y	R10-H14353-Y


Description	Poles	Model number 6A	Model number 10A
 <p>9 Way NO OFF 9-Position 30°</p>	1	R6-J15T54-Y	R10-J15T54-Y


Description	Poles	Model number 6A	Model number 10A
 <p>9 Way with OFF 10-Position 30°</p>	1	R6-J15355-Y	R10-J15355-Y

Description	Poles	Model number 6A	Model number 10A
 <p>10 Way NO OFF 10-Position 30°</p>	1	R6-K15T56-Y	R10-K15T56-Y

Description	Poles	Model number 6A	Model number 10A
 <p>10 Way with OFF 11-Position 30°</p>	1	R6-K15357-Y	R10-K15357-Y

Description	Poles	Model number 6A	Model number 10A
 <p>11 Way NO OFF 11-Position 30°</p>	1	R6-L16T58-Y	R10-L16T58-Y




Description	Poles	Model number 6A	Model number 10A
 <p>11 Way with OFF 12-Position 30°</p>	1	R6-L16359-Y	R10-L16359-Y

Description	Poles	Model number 6A	Model number 10A
 <p>12 Way NO OFF 12-Position 30°</p>	1	R6-M16T60-Y	R10-M16T60-Y



ANNEXURE A

VOLTMETER / AMMETER SWITCHES

VOLTMETER SWITCHES

Description	Model number 10A	Model number 6A
 <p>VOLTMETER Voltage between phases & each phase & Neutral with OFF 7-Position 45°</p>	R10-V23461-Y	R6-V23461-Y
 <p>VOLTMETER Voltage between phases & Neutral with OFF 4-Position 90°</p>	R10-V22963-Y	R6-V22963-Y
 <p>VOLTMETER Voltage between phases with OFF 4-Position 90°</p>	R10-V22962-Y	R6-V22962-Y

AMMETER SWITCHES

Description	Model number 10A	Model number 6A
 <p>AMMETER Current in each phase Neutral & Leakage With OFF 4-Position 90°</p>	R10-R33964-Y	R6-R33964-Y
 <p>AMMETER Current in each phase Neutral & Leakage with OFF 6-Position 45°</p>	R10-R55465-Y	R6-R55465-Y