

**SHXX-3.5**



**Female PCB Plug Connectors In 3.5 mm Pitch - Horizontal Type**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 1.5 sq mm Wire Termination.
- 3) Current Rating is 8 amp.

**TECHNICAL DATA**

Pin Spacing	3.5 mm
Rated Voltage	300 V
Rated Current	8 A
Tightening Torque	0.2 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Number of Poles	2 to 24
Mounting Possibility	PCB
Screw Size	M2
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.2 mm <sup>2</sup>
Conductor Cross Section Stranded max.	1.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	16 AWG
Stripping Length	7.0 mm

**DIMENSIONS**

Height	11.1 mm
Width (Thickness)	15.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SH02-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 2 Pole.	50
SH03-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 3 Pole.	50
SH04-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 4 Pole.	50
SH05-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 5 Pole.	50
SH06-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 6 Pole.	50
SH07-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 7 Pole.	50
SH08-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 8 Pole.	50
SH09-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 9 Pole.	50
SH10-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 10 Pole.	50
SH11-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 11 Pole.	50
SH12-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 12 Pole.	50
SH13-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 13 Pole.	50
SH14-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 14 Pole.	50
SH15-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 15 Pole.	50
SH16-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 16 Pole.	50
SH17-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 17 Pole.	50
SH18-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 18 Pole.	50
SH19-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 19 Pole.	50
SH20-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 20 Pole.	50
SH21-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 21 Pole.	50
SH22-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 22 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SH23-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 23 Pole.	50
SH24-3.5	Horizontal Female Plug of 3.5 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.5/XX	Marking Tags for PCB Terminal Blocks of 3.5 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

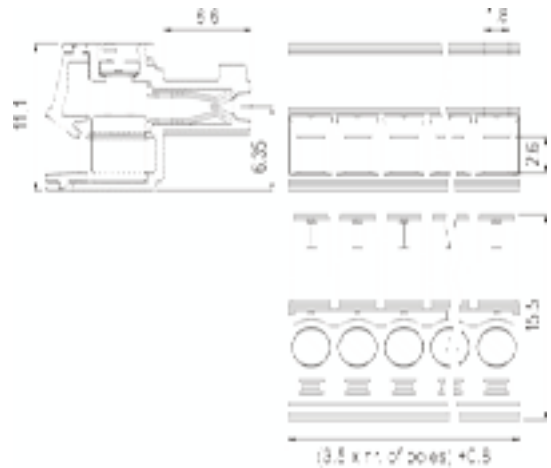

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Conductor Cross Section Stranded min.	30 AWG	0.2 mm <sup>2</sup>
Conductor Cross Section Stranded max.	16 AWG	1.5 mm <sup>2</sup>
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A
Tightening Torque	2.3 lb-in	0.2 Nm

**SHXX-3.81**



**Female PCB Plug PCB Connectors In 3.81 mm Pitch - Horizontal Type**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 1.5 sq mm Wire Termination.
- 3) Current Rating is 8 amp.

**TECHNICAL DATA**

Pin Spacing	3.81 mm
Rated Voltage	300 V
Rated Current	8 A
Tightening Torque	0.2 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Number of Poles	2 to 24
Mounting Possibility	PCB
Screw Size	M2
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	1.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	16 AWG
Stripping Length	7.0 mm

**DIMENSIONS**

Height	11.1 mm
Width (Thickness)	15.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SH02-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 2 Pole.	50
SH03-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 3 Pole.	50
SH04-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 4 Pole.	50
SH05-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 5 Pole.	50
SH06-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 6 Pole.	50
SH07-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 7 Pole.	50
SH08-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 8 Pole.	50
SH09-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 9 Pole.	50
SH10-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 10 Pole.	50
SH11-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 11 Pole.	50
SH12-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 12 Pole.	50
SH13-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 13 Pole.	50
SH14-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 14 Pole.	50
SH15-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 15 Pole.	50
SH16-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 16 Pole.	50
SH17-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 17 Pole.	50
SH18-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 18 Pole.	50
SH19-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 19 Pole.	50
SH20-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 20 Pole.	50
SH21-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 21 Pole.	50
SH22-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 22 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SH23-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 23 Pole.	50
SH24-3.81	Horizontal Female Plug of 3.81 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.81/XX	Marking Tags for PCB Terminal Blocks of 3.81 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

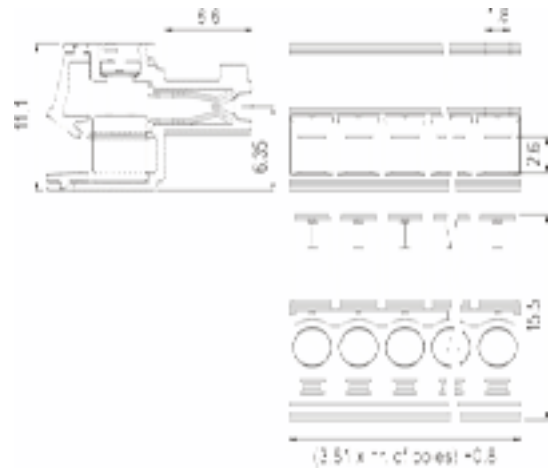

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059
Approvals	UL
Conductor Cross Section Stranded min.	30 AWG
Conductor Cross Section Stranded max.	16 AWG
Rated Voltage	300 V
Rated Current	8 A
Tightening Torque	2.3 lb-in

SHXX-5.0



**Female PCB Plug PCB Connectors In 5.0 mm Pitch - Horizontal Type**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 2.5 sq mm Wire Termination.
- 3) Current Rating is 16 amp.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Tightening Torque	0.5 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Number of Poles	2 to 24
Mounting Possibility	PCB
Screw Size	M3
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	2.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	14 AWG
Stripping Length	7.5 mm

**DIMENSIONS**

Height	15.5 mm
Width (Thickness)	19.15 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SH02-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 2 Pole.	50
SH03-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 3 Pole.	50
SH04-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 4 Pole.	50
SH05-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 5 Pole.	50
SH06-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 6 Pole.	50
SH07-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 7 Pole.	50
SH08-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 8 Pole.	50
SH09-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 9 Pole.	50
SH10-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 10 Pole.	50
SH11-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 11 Pole.	50
SH12-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 12 Pole.	50
SH13-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 13 Pole.	50
SH14-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 14 Pole.	50
SH15-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 15 Pole.	50
SH16-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 16 Pole.	50
SH17-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 17 Pole.	50
SH18-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 18 Pole.	50
SH19-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 19 Pole.	50
SH20-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 20 Pole.	50
SH21-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 21 Pole.	50
SH22-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 22 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SH23-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 23 Pole.	50
SH24-5.0	Horizontal Female Plug of 5.0 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

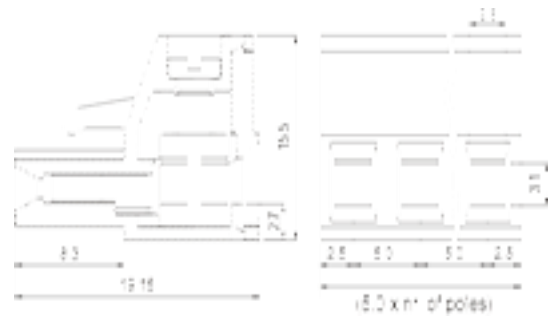

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Conductor Cross Section Stranded min.	30 AWG	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	14 AWG	2.5 mm <sup>2</sup>
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A
Tightening Torque	4.5 lb-in	0.5 Nm

**SVRXX-5.0**



**Female PCB Plug Connectors In 5.0 mm Pitch - Horizontal Right Angle Type.**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 2.5 sq mm Wire Termination.
- 3) Current Rating is 12 amp.
- 4) Suitable for 5 mm Pitch PCB Connections.
- 5) Vertical Orientation with respect to PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Tightening Torque	0.5 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Number of Poles	2 to 24
Mounting Possibility	PCB
Screw Size	M3
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	2.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	14 AWG
Stripping Length	9.4 mm

**DIMENSIONS**

Height	17 mm
Width (Thickness)	20.1 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SVR02-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 2 Pole.	50
SVR03-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 3 Pole.	50
SVR04-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 4 Pole.	50
SVR05-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 5 Pole.	50
SVR06-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 6 Pole.	50
SVR07-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 7 Pole.	50
SVR08-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 8 Pole.	50
SVR09-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 9 Pole.	50
SVR10-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 10 Pole.	50
SVR11-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 11 Pole.	50
SVR12-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 12 Pole.	50
SVR13-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 13 Pole.	50
SVR14-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 14 Pole.	50
SVR15-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 15 Pole.	50
SVR16-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 16 Pole.	50
SVR17-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 17 Pole.	50
SVR18-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 18 Pole.	50
SVR19-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 19 Pole.	50
SVR20-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 20 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SVR21-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 21 Pole.	50
SVR22-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 22 Pole.	50
SVR23-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 23 Pole.	50
SVR24-5.0	Horizontal Right Angled Female Plug of 5.0 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

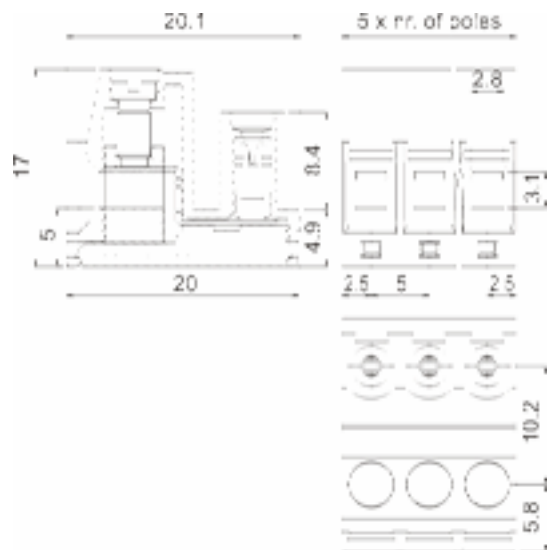

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Conductor Cross Section Stranded min.	30 AWG	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	14 AWG	2.5 mm <sup>2</sup>
Rated Voltage	300 V	250 V
Rated Current	12 A	16 A
Tightening Torque	4.5 lb-in	0.5 Nm



**SVRXX-5.0-K**



**Female PCB Plug Connectors In 5.0 mm Pitch - Horizontal Right Angled Panel Mount**

- 1) Available in 2 to 22 Pole design.
- 2) Suitable For 2.5 sq mm Wire Termination.
- 3) Current Rating is 12 amp.
- 4) Suitable for 5 mm Pitch PCB Connections.
- 5) Vertical Orientation with respect to PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Tightening Torque	0.5 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Number of Poles	2 to 22
Mounting Possibility	Panel/Surface
Screw Size	M3
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	2.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	14 AWG
Stripping Length	9.4 mm

**DIMENSIONS**

Height	17 mm
Width (Thickness)	20.1 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SVR02-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 2 Pole.	50
SVR03-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 3 Pole.	50
SVR04-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 4 Pole.	50
SVR05-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 5 Pole.	50
SVR06-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 6 Pole.	50
SVR07-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 7 Pole.	50
SVR08-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 8 Pole.	50
SVR09-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 9 Pole.	50
SVR10-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 10 Pole.	50
SVR11-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 11 Pole.	50
SVR12-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 12 Pole.	50
SVR13-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 13 Pole.	50
SVR14-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 14 Pole.	50
SVR15-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 15 Pole.	50
SVR16-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 16 Pole.	50
SVR17-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 17 Pole.	50
SVR18-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 18 Pole.	50
SVR19-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 19 Pole.	50
SVR20-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 20 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SVR21-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 21 Pole.	50
SVR22-5.0-K	Horizontal Right angled Female Plug Panel Mount of 5.0 mm Pitch Available in 22 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 22 Pole.

**PRODUCT DIAGRAM**

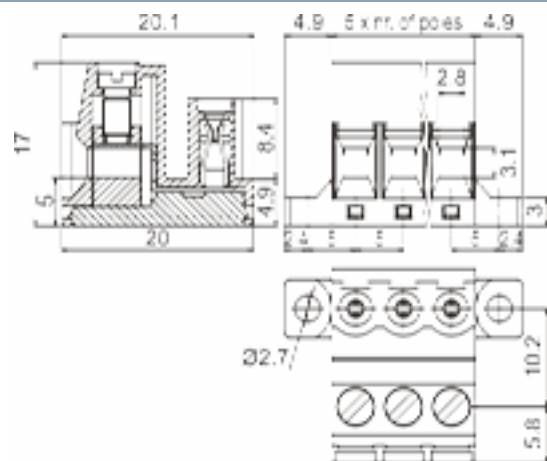

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Conductor Cross Section Stranded min.	30 AWG	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	14 AWG	2.5 mm <sup>2</sup>
Rated Voltage	300 V	250 V
Rated Current	12 A	16 A
Tightening Torque	4.5 lb-in	0.5 Nm

**TL205T**



**Female PCB Plug Connectors In 5.0 mm Pitch.**

- 1) Economical Wire Protector Type Connection.
- 2) Suitable for mating with TL205P male headers of 5mm pitch only.
- 2) Available in 2 & 3 Pole Stackable Design.
- 3) Can be Oriented at 90 deg, 180 deg & 270 deg with respect to PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	10 A
Tightening Torque	0.4 Nm
Housing Material	Polyamide
Standard Colour	Black
Type of Connection	Screw Clamp
Product Function	Horizontal Female Plugs for PCB
Wire Entry Orientation	90,180,270 Deg To PCB
Number of Poles	2 and 3
Mounting Possibility	PCB
Screw Size	M2.5
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	1.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	20 AWG
Conductor Cross Section AWG/Kcmil max	14 AWG
Stripping Length	6 mm

**DIMENSIONS**

Height	10.8 mm
Width (Thickness)	13.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
TL205T-02	Female Plug Suitable For TL205P Male Terminal Strip of 5.0 mm Pitch Available in 02 Pole.	50
TL205T-03	Female Plug Suitable For TL205P Male Terminal Strip of 5.0 mm Pitch Available in 03 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 and 3 Pole and it is stackable.

**PRODUCT DIAGRAM**

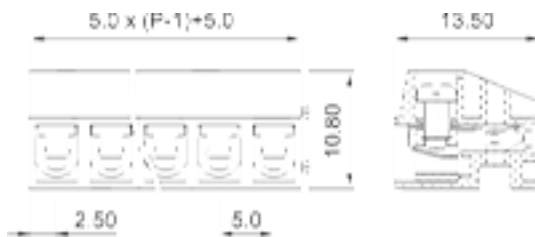

SFXX-5.08



**Male Horizontal Plug Connector In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Wire Entry Parallel to Male Header Pins.
- 5) Suitable For 2.5 Sq mm Wire Termination.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Tightening Torque	0.5 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Screw Clamp
Product Function	Male Plugs for PCB
Number of Poles	2 to 24
Mounting Possibility	Panel/Surface
Screw Size	M3
Operated by	Screwdriver

**CONNECTION DATA**

Conductor Cross Section Stranded min.	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	2.5 mm <sup>2</sup>
Conductor Cross Section AWG/Kcmil min	30 AWG
Conductor Cross Section AWG/Kcmil max	14 AWG
Stripping Length	7.5 mm

**DIMENSIONS**

Height	15.5 mm
Width (Thickness)	19.2 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
SF02-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 2 Pole.	50
SF03-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 3 Pole.	50
SF04-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 4 Pole.	50
SF05-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 5 Pole.	50
SF06-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 6 Pole.	50
SF07-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 7 Pole.	50
SF08-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 8 Pole.	50
SF09-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 9 Pole.	50
SF10-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 10 Pole.	50
SF11-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 11 Pole.	50
SF12-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 12 Pole.	50
SF13-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 13 Pole.	50
SF14-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 14 Pole.	50
SF15-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 15 Pole.	50
SF16-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 16 Pole.	50
SF17-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 17 Pole.	50
SF18-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 18 Pole.	50
SF19-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 19 Pole.	50
SF20-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 20 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
SF21-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 21 Pole.	50
SF22-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 22 Pole.	50
SF23-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 23 Pole.	50
SF24-5.08	Male Horizontal Plug of 5.08 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

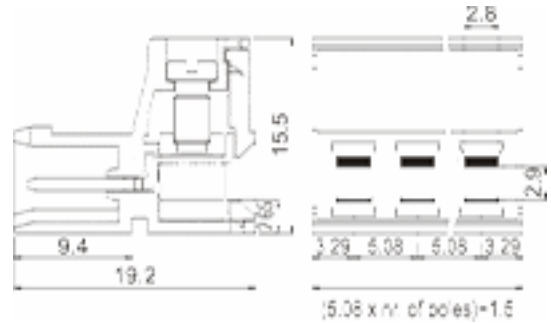

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Conductor Cross Section Stranded min.	30 AWG	0.5 mm <sup>2</sup>
Conductor Cross Section Stranded max.	14 AWG	2.5 mm <sup>2</sup>
Rated Voltage	300 V	300 V
Rated Current	12 A	12 A
Tightening Torque	4.5 lb-in	0.5 Nm

PHXX-3.5



**Open Type Horizontal PCB Male Header In 3.5 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.5 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Open Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.5 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.5/XX	Marking Tags for PCB Terminal Blocks of 3.5 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**DIMENSIONS**

Height	7.25 mm
Width (Thickness)	9.2 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 02 Pole.	50
PH03-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 03 Pole.	50
PH04-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 04 Pole.	50
PH05-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 05 Pole.	50
PH06-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 06 Pole.	50
PH07-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 07 Pole.	50
PH08-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 08 Pole.	50
PH09-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 09 Pole.	50
PH10-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 10 Pole.	50
PH11-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 11 Pole.	50
PH12-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 12 Pole.	50
PH13-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 13 Pole.	50
PH14-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 14 Pole.	50
PH15-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 15 Pole.	50
PH16-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 16 Pole.	50
PH17-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 17 Pole.	50
PH18-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 18 Pole.	50
PH19-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 19 Pole.	50
PH20-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 20 Pole.	50
PH21-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 21 Pole.	50
PH22-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 22 Pole.	50
PH23-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 23 Pole.	50
PH24-3.5	Open Horizontal Male Header Of 3.5 mm Pitch available In 24 Pole.	50

**PRODUCT DIAGRAM**

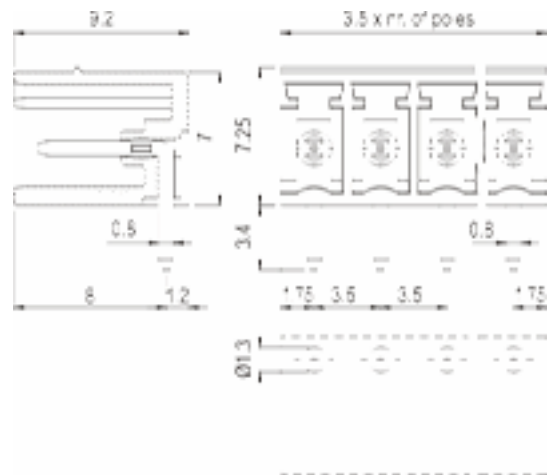

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

**PHXX-3.5-P**




**Closed Type Horizontal PCB Male Header In 3.5 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.5 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Closed Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.5 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.5/XX	Marking Tags for PCB Terminal Blocks of 3.5 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**DIMENSIONS**

Height	7.25 mm
Width (Thickness)	9.2 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 02 Pole.	50
PH03-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 03 Pole.	50
PH04-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 04 Pole.	50
PH05-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 05 Pole.	50
PH06-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 06 Pole.	50
PH07-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 07 Pole.	50
PH08-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 08 Pole.	50
PH09-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 09 Pole.	50
PH10-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 10 Pole.	50
PH11-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 11 Pole.	50
PH12-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 12 Pole.	50
PH13-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 13 Pole.	50
PH14-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 14 Pole.	50
PH15-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 15 Pole.	50
PH16-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 16 Pole.	50
PH17-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 17 Pole.	50
PH18-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 18 Pole.	50
PH19-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 19 Pole.	50
PH20-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 20 Pole.	50
PH21-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 21 Pole.	50
PH22-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 22 Pole.	50
PH23-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 23 Pole.	50
PH24-3.5-P	Closed Horizontal Male Header Of 3.5 mm Pitch available In 24 Pole.	50

**PRODUCT DIAGRAM**

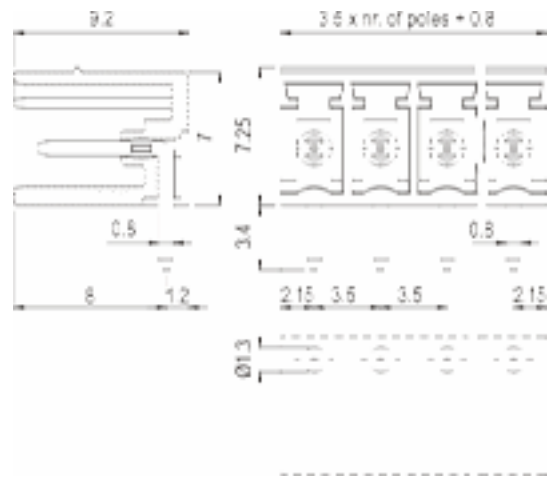



## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

**PVXX-3.5**



**Open Vertical PCB Male Header in 3.5 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.5 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Open Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.5 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	9.2 mm
Width (Thickness)	7.25 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 2 Pole.	50
PV03-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 3 Pole.	50
PV04-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 4 Pole.	50
PV05-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 5 Pole.	50
PV06-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 6 Pole.	50
PV07-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 7 Pole.	50
PV08-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 8 Pole.	50
PV09-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 9 Pole.	50
PV10-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 10 Pole.	50
PV11-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 11 Pole.	50
PV12-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 12 Pole.	50
PV13-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 13 Pole.	50
PV14-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 14 Pole.	50
PV15-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 15 Pole.	50
PV16-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 16 Pole.	50
PV17-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 17 Pole.	50
PV18-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 18 Pole.	50
PV19-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 19 Pole.	50
PV20-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 20 Pole.	50
PV21-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 21 Pole.	50
PV22-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 22 Pole.	50
PV23-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 23 Pole.	50
PV24-3.5	Open Vertical Male Header Of 3.5 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.5/XX	Marking Tags for PCB Terminal Blocks of 3.5 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

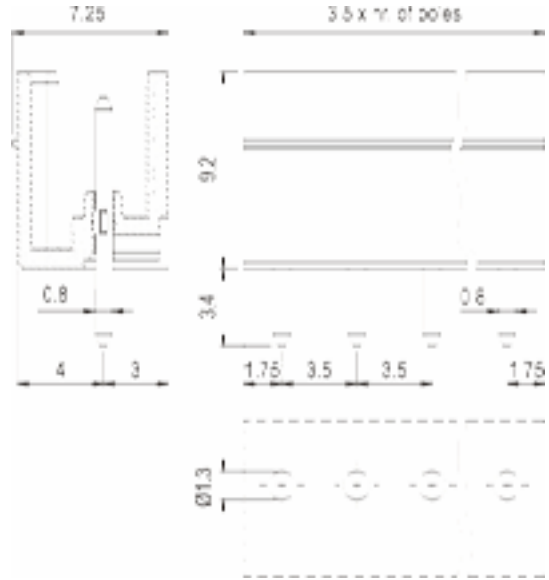

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

PVXX-3.5-P



**Closed Vertical PCB Male Headers In 3.5 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.5 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Closed Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.5 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 TO 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	9.2 mm
Width (Thickness)	7.25 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 02 Pole.	50
PV03-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 03 Pole.	50
PV04-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 04 Pole.	50
PV05-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 05 Pole.	50
PV06-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 06 Pole.	50
PV07-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 07 Pole.	50
PV08-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 08 Pole.	50
PV09-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 09 Pole.	50
PV10-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 10 Pole.	50
PV11-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 11 Pole.	50
PV12-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 12 Pole.	50
PV13-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 13 Pole.	50
PV14-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 14 Pole.	50
PV15-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 15 Pole.	50
PV16-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 16 Pole.	50
PV17-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 17 Pole.	50
PV18-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 18 Pole.	50
PV19-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 19 Pole.	50
PV20-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 20 Pole.	50
PV21-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 21 Pole.	50
PV22-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 22 Pole.	50
PV23-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 23 Pole.	50
PV24-3.5-P	Closed Vertical Male Header Of 3.5 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.5/XX	Marking Tags for PCB Terminal Blocks of 3.5 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

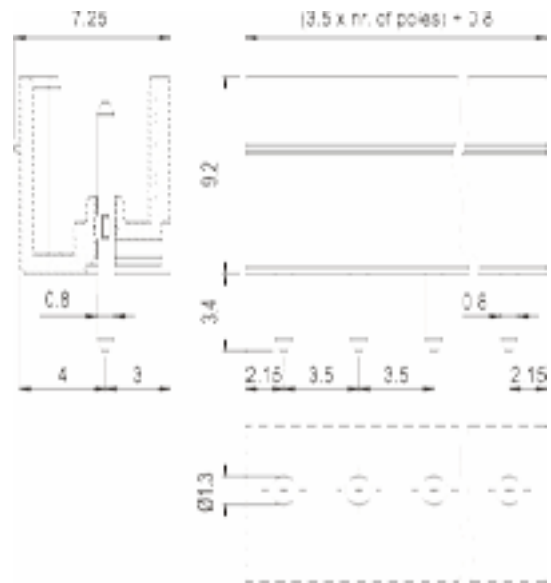

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

**PHXX-3.81**



**Open Horizontal PCB Male Headers In 3.81 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.81 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Open Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.81 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	7.25 mm
Width (Thickness)	9.2 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 02 Pole.	50
PH03-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 03 Pole.	50
PH04-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 04 Pole.	50
PH05-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 05 Pole.	50
PH06-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 06 Pole.	50
PH07-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 07 Pole.	50
PH08-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 08 Pole.	50
PH09-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 09 Pole.	50
PH10-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 10 Pole.	50
PH11-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 11 Pole.	50
PH12-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 12 Pole.	50
PH13-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 13 Pole.	50
PH14-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 14 Pole.	50
PH15-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 15 Pole.	50
PH16-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 16 Pole.	50
PH17-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 17 Pole.	50
PH18-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 18 Pole.	50
PH19-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 19 Pole.	50
PH20-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 20 Pole.	50
PH21-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 21 Pole.	50
PH22-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 22 Pole.	50
PH23-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 23 Pole.	50
PH24-3.81	Open Horizontal Male Header Of 3.81 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.81/XX	Marking Tags for PCB Terminal Blocks of 3.81 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

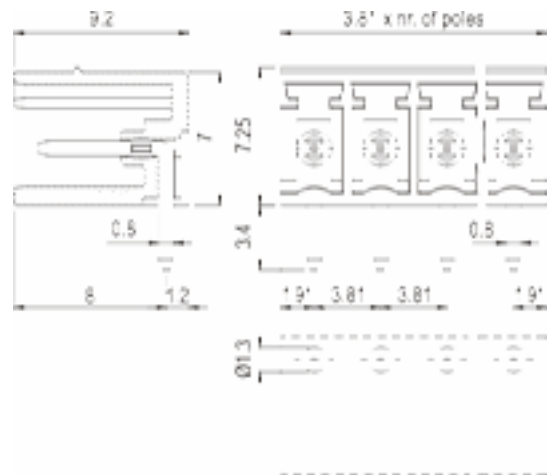

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

**PHXX-3.81-P**



**Close Horizontal PCB Male Headers In 3.81 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.81 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Closed Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.81 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.81/XX	Marking Tags for PCB Terminal Blocks of 3.81 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**DIMENSIONS**

Height	7.25 mm
Width (Thickness)	9.2 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 02 Pole.	50
PH03-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 03 Pole.	50
PH04-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 04 Pole.	50
PH05-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 05 Pole.	50
PH06-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 06 Pole.	50
PH07-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 07 Pole.	50
PH08-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 08 Pole.	50
PH09-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 09 Pole.	50
PH10-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 10 Pole.	50
PH11-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 11 Pole.	50
PH12-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 12 Pole.	50
PH13-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 13 Pole.	50
PH14-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 14 Pole.	50
PH15-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 15 Pole.	50
PH16-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 16 Pole.	50
PH17-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 17 Pole.	50
PH18-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 18 Pole.	50
PH19-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 19 Pole.	50
PH20-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 20 Pole.	50
PH21-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 21 Pole.	50
PH22-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 22 Pole.	50
PH23-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 23 Pole.	50
PH24-3.81-P	Closed Horizontal Male Header Of 3.81 mm Pitch available In 24 Pole.	50

**PRODUCT DIAGRAM**

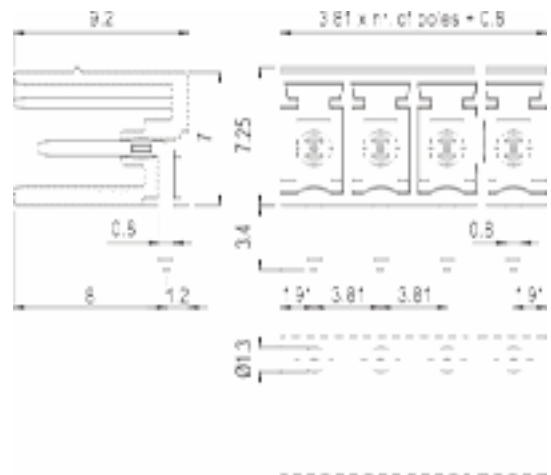



## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

**PVXX-3.81**



**Open Vertical PCB Male Header in 3.81 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.81 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Open Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.81 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	9.2 mm
Width (Thickness)	7.25 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 2 Pole.	50
PV03-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 3 Pole.	50
PV04-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 4 Pole.	50
PV05-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 5 Pole.	50
PV06-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 6 Pole.	50
PV07-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 7 Pole.	50
PV08-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 8 Pole.	50
PV09-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 9 Pole.	50
PV10-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 10 Pole.	50
PV11-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 11 Pole.	50
PV12-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 12 Pole.	50
PV13-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 13 Pole.	50
PV14-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 14 Pole.	50
PV15-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 15 Pole.	50
PV16-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 16 Pole.	50
PV17-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 17 Pole.	50
PV18-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 18 Pole.	50
PV19-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 19 Pole.	50
PV20-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 20 Pole.	50
PV21-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 21 Pole.	50
PV22-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 22 Pole.	50
PV23-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 23 Pole.	50
PV24-3.81	Open Vertical Male Header Of 3.81 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/3.81/XX	Marking Tags for PCB Terminal Blocks of 3.81 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

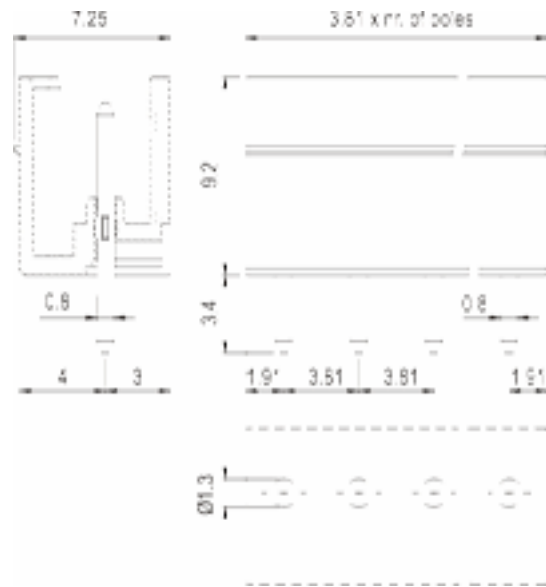

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

PVXX-3.81-P



**Closed Vertical PCB Male Header In 3.81 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 3.81 mm Pitch PCB Connection.
- 3) Current Rating is 8 amp.
- 4) Available in Closed Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	3.81 mm
Rated Voltage	300 V
Rated Current	8 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 TO 24
PCB Hole Size Diameter	1.3 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	9.2 mm
Width (Thickness)	7.25 mm

**APPROVALS**




**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 02 Pole.	50
PV03-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 03 Pole.	50
PV04-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 04 Pole.	50
PV05-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 05 Pole.	50
PV06-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 06 Pole.	50
PV07-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 07 Pole.	50
PV08-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 08 Pole.	50
PV09-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 09 Pole.	50
PV10-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 10 Pole.	50
PV11-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 11 Pole.	50
PV12-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 12 Pole.	50
PV13-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 13 Pole.	50
PV14-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 14 Pole.	50
PV15-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 15 Pole.	50
PV16-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 16 Pole.	50
PV17-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 17 Pole.	50
PV18-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 18 Pole.	50
PV19-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 19 Pole.	50
PV20-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 20 Pole.	50
PV21-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 21 Pole.	50
PV22-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 22 Pole.	50
PV23-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 23 Pole.	50
PV24-3.81-P	Closed Vertical Male Header Of 3.81 mm Pitch available In 24 Pole.	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

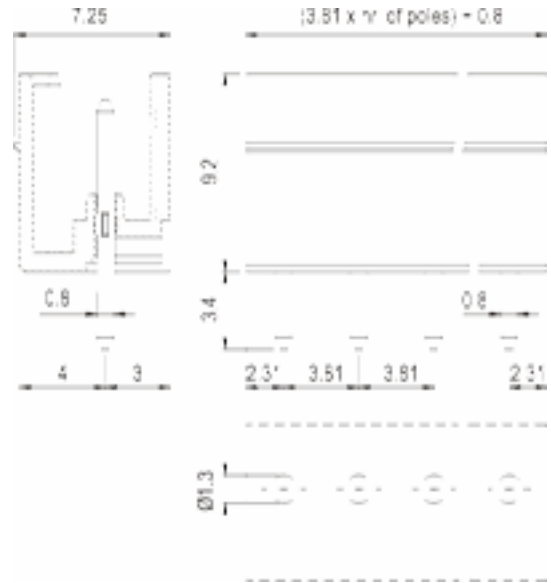

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	130 V
Rated Current	8 A	8 A

PHXX-5.0



**Open Horizontal PCB Male Header In 5.0 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.0 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Open Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 TO 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	8.5 mm
Width (Thickness)	12.2 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 02 Pole.	50
PH03-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 03 Pole.	50
PH04-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 04 Pole.	50
PH05-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 05 Pole.	50
PH06-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 06 Pole.	50
PH07-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 07 Pole.	50
PH08-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 08 Pole.	50
PH09-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 09 Pole.	50
PH10-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 10 Pole.	50
PH11-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 11 Pole.	50
PH12-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 12 Pole.	50
PH13-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 13 Pole.	50
PH14-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 14 Pole.	50
PH15-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 15 Pole.	50
PH16-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 16 Pole.	50
PH17-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 17 Pole.	50
PH18-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 18 Pole.	50
PH19-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 19 Pole.	50
PH20-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 20 Pole.	50
PH21-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 21 Pole.	50
PH22-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 22 Pole.	50
PH23-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 23 Pole.	50
PH24-5.0	Open Horizontal Male Header Of 5.0 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

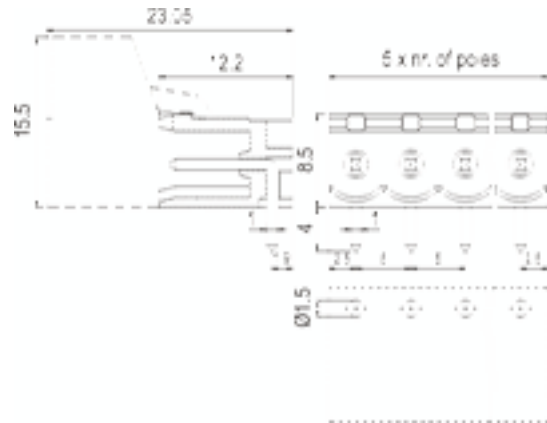

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

**PHXX-5.0-P**



**Closed Horizontal PCB Male Headers In 5.0 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.0 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Closed Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**DIMENSIONS**

Height	8.5 mm
Width (Thickness)	12.2 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 02 Pole.	50
PH03-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 03 Pole.	50
PH04-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 04 Pole.	50
PH05-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 05 Pole.	50
PH06-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 06 Pole.	50
PH07-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 07 Pole.	50
PH08-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 08 Pole.	50
PH09-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 09 Pole.	50
PH10-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 10 Pole.	50
PH11-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 11 Pole.	50
PH12-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available in 12 Pole.	50
PH13-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 13 Pole.	50
PH14-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 14 Pole.	50
PH15-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 15 Pole.	50
PH16-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 16 Pole.	50
PH17-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 17 Pole.	50
PH18-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 18 Pole.	50
PH19-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 19 Pole.	50
PH20-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 20 Pole.	50
PH21-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 21 Pole.	50
PH22-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 22 Pole.	50
PH23-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 23 Pole.	50
PH24-5.0-P	Closed Horizontal Male Header Of 5.0 mm Pitch available In 24 Pole.	50

**PRODUCT DIAGRAM**

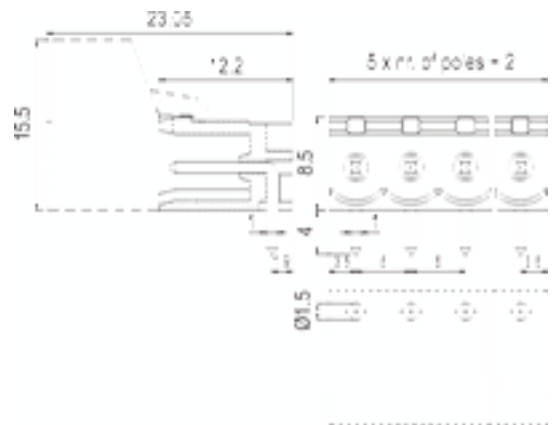



## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

PVXX-5.0



**Open Vertical PCB Male Headers In 5.0 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.0 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Open Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.0 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 TO 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	12.2 mm
Width (Thickness)	8.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 02 Pole.	50
PV03-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 03 Pole.	50
PV04-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 04 Pole.	50
PV05-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 05 Pole.	50
PV06-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 06 Pole.	50
PV07-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 07 Pole.	50
PV08-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 08 Pole.	50
PV09-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 09 Pole.	50
PV10-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 10 Pole.	50
PV11-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 11 Pole.	50
PV12-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 12 Pole.	50
PV13-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 13 Pole.	50
PV14-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 14 Pole.	50
PV15-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 15 Pole.	50
PV16-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 16 Pole.	50
PV17-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 17 Pole.	50
PV18-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 18 Pole.	50
PV19-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 19 Pole.	50
PV20-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 20 Pole.	50
PV21-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 21 Pole.	50
PV22-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 22 Pole.	50
PV23-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 23 Pole.	50
PV24-5.0	Open Vertical Male Header Of 5.0 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

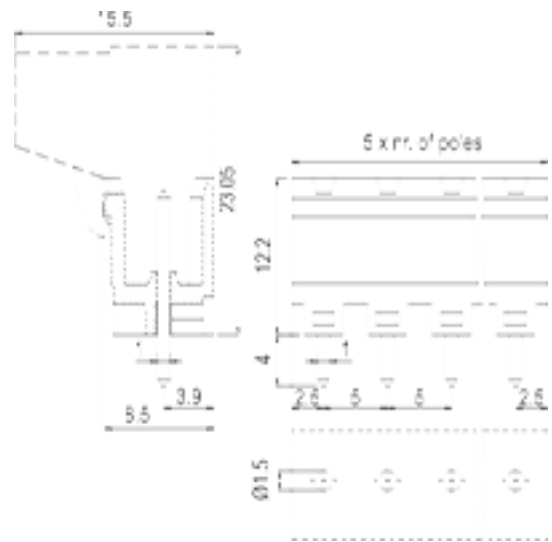

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

PVXX-5.0-P




**Closed Vertical PCB Male Headers In 5.0 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.0 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Closed Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	300 mm
Weight	12 gms
Tightening Torque - Input Side	1.5 Nm
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 TO 24
Mounting Possibility	PCB

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**DIMENSIONS**

Height with DIN 35 x 7.5 mm rail	8.5 mm
Width (Thickness)	8.5 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 02 Pole.	50
PV03-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 03 Pole.	50
PV04-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 04 Pole.	50
PV05-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 05 Pole.	50
PV06-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 06 Pole.	50
PV07-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 07 Pole.	50
PV08-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 08 Pole.	50
PV09-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 09 Pole.	50
PV10-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 10 Pole.	50
PV11-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 11 Pole.	50
PV12-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 12 Pole.	50
PV13-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 13 Pole.	50
PV14-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 14 Pole.	50
PV15-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 15 Pole.	50
PV16-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 16 Pole.	50
PV17-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 17 Pole.	50
PV18-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 18 Pole.	50
PV19-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 19 Pole.	50
PV20-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 20 Pole.	50
PV21-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 21 Pole.	50
PV22-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 22 Pole.	50
PV23-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 23 Pole.	50
PV24-5.0-P	Closed Vertical Male Header Of 5.0 mm Pitch available In 24 Pole.	50

**PRODUCT DIAGRAM**

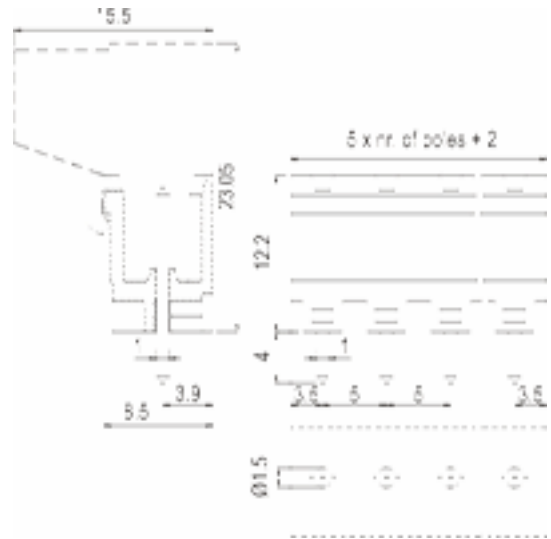

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

TL205P



**PCB Male Headers in 5.0 mm Pitch**

- 1) Economical Male Header For TL205T.
- 2) Available in 2 to 24 Pole Design.
- 3) Current Rating is 10 amp.

**TECHNICAL DATA**

Pin Spacing	5.00 mm
Rated Voltage	300 V
Rated Current	10 A
Housing Material	Polyamide
Standard Colour	Black
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.7 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	12.5 mm
Width (Thickness)	2.8 mm

**APPROVALS**




**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
TL205P-02	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 02 Pole.	50
TL205P-03	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 03 Pole.	50
TL205P-04	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 04 Pole.	50
TL205P-05	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 05 Pole.	50
TL205P-06	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 06 Pole.	50
TL205P-07	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 07 Pole.	50
TL205P-08	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 08 Pole.	50
TL205P-09	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 09 Pole.	50
TL205P-10	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 10 Pole.	50
TL205P-11	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 11 Pole.	50
TL205P-12	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 12 Pole.	50
TL205P-13	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 13 Pole.	50
TL205P-14	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 14 Pole.	50
TL205P-15	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 15 Pole.	50
TL205P-16	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 16 Pole.	50
TL205P-17	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 17 Pole.	50
TL205P-18	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 18 Pole.	50
TL205P-19	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 19 Pole.	50
TL205P-20	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 20 Pole.	50

**ORDERING INFORMATION....**

CAT. NO.	DESCRIPTION	STD. PACK
TL205P-21	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 21 Pole.	50
TL205P-22	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 22 Pole.	50
TL205P-23	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 23 Pole.	50
TL205P-24	Male Terminal Strips Suitable For TL205T Female Plug of 5.0 mm Pitch Available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.0/XX	Marking Tags for PCB Terminal Blocks of 5.0 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole .

**PRODUCT DIAGRAM**

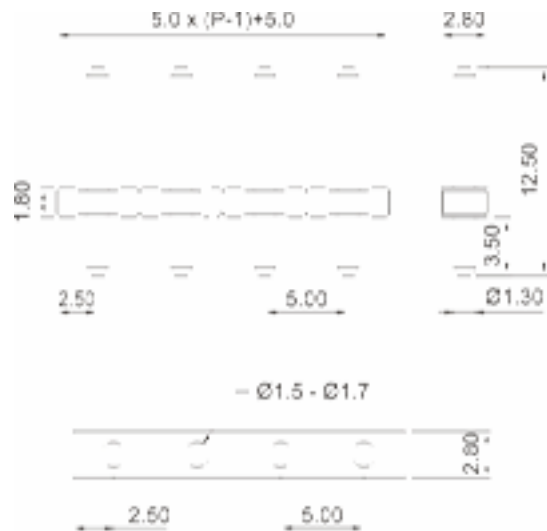

## RATINGS AS PER STANDARDS

STANDARDS	EN61984	UL 1059
Rated Voltage	250 V	300 V
Rated Current	10 A	10 A

PDSHXX-5.08



**Double Level Open Horizontal PCB Male headers In 5.08 mm Pitch**

- 1) Suitable For 5.08 mm Pitch PCB Connection.
- 2) Current Rating : 16 amp.
- 3) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Double Level
Number of Poles	4 and 6
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	23.74 mm
Width (Thickness)	22.0 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PDSH02-5.08	Double Level Open Horizontal Male Header Of 5.08 mm Pitch Available in 4 Pole.	50
PDSH03-5.08	Double Level Open Horizontal Male Header Of 5.08 mm Pitch Available in 6 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**


Available in 4 and 6 Pole and it is stackable.

**PRODUCT DIAGRAM**

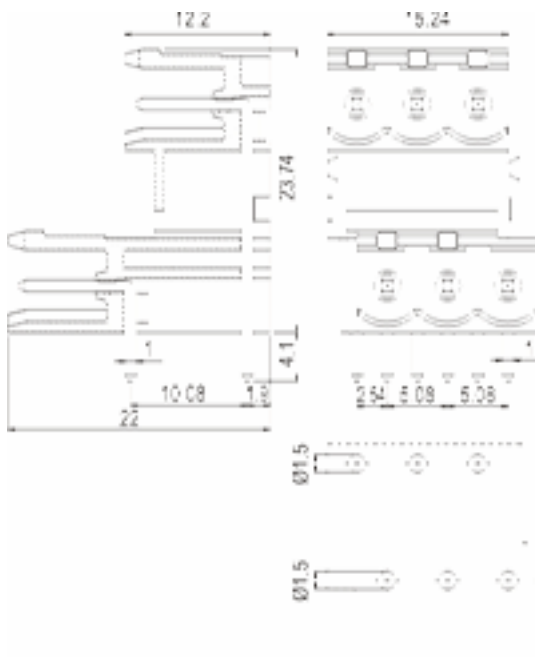



**PDSVXX-5.08**



**Double Level Open Vertical PCB Male headers In 5.08 mm Pitch**

- 1) Suitable For 5.08 mm Pitch PCB Connection.
- 2) Current Rating is 16 amp.
- 3) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Double Level
Number of Poles	4 and 6
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	22.0 mm
Width (Thickness)	23.74 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PDSV02-5.08	Double Level Open Vertical Male Header Of 5.08 mm Pitch Available in 4 Pole.	50
PDSV03-5.08	Double Level Open Vertical Male Header Of 5.08 mm Pitch Available in 6 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 4 and 6 Poles and it is stackable.

**PRODUCT DIAGRAM**

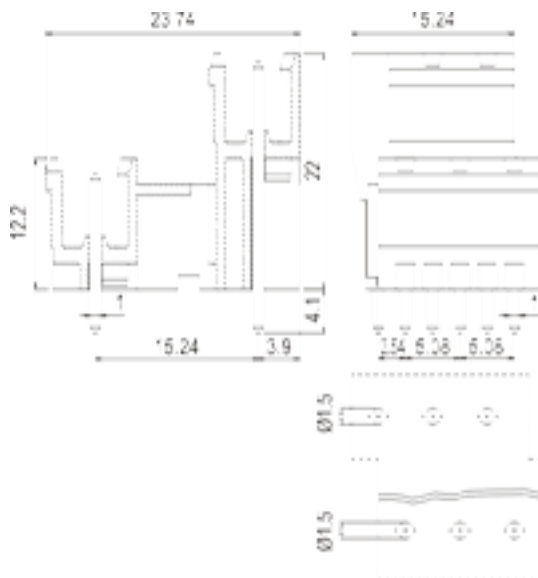

**RATINGS AS PER STANDARDS**

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

**PHXX-5.08**



**Open Horizontal PCB Male Header In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating : 16 amp.
- 4) Available in Open Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	8.5 mm
Width (Thickness)	12.2 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 02 Pole.	50
PH03-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 03 Pole.	50
PH04-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 04 Pole.	50
PH05-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 05 Pole.	50
PH06-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 06 Pole.	50
PH07-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 07 Pole.	50
PH08-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 08 Pole.	50
PH09-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 09 Pole.	50
PH10-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 10 Pole.	50
PH11-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 11 Pole.	50
PH12-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 12 Pole.	50
PH13-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 13 Pole.	50
PH14-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 14 Pole.	50
PH15-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 15 Pole.	50
PH16-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 16 Pole.	50
PH17-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 17 Pole.	50
PH18-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 18 Pole.	50
PH19-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 19 Pole.	50
PH20-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 20 Pole.	50
PH21-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 21 Pole.	50
PH22-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 22 Pole.	50
PH23-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 23 Pole.	50
PH24-5.08	Open Horizontal Male Header Of 5.08 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

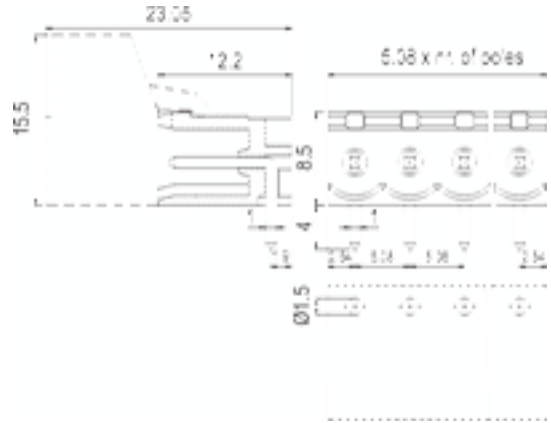

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

PHXX-5.08-P



**Closed Horizontal PCB Male Header In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating :16 amp.
- 4) Available in Closed Designs.
- 5) Horizontal Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Horizontal Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	8.5 mm
Width (Thickness)	12.2 mm


**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PH02-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 02 Pole.	50
PH03-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 03 Pole.	50
PH04-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 04 Pole.	50
PH05-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 05 Pole.	50
PH06-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 06 Pole.	50
PH07-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 07 Pole.	50
PH08-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 08 Pole.	50
PH09-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 09 Pole.	50
PH10-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 10 Pole.	50
PH11-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 11 Pole.	50
PH12-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 12 Pole.	50
PH13-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 13 Pole.	50
PH14-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 14 Pole.	50
PH15-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 15 Pole.	50
PH16-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 16 Pole.	50
PH17-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 17 Pole.	50
PH18-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 18 Pole.	50
PH19-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 19 Pole.	50
PH20-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 20 Pole.	50
PH21-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 21 Pole.	50
PH22-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available In 22 Pole.	50
PH23-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available in 23 Pole.	50
PH24-5.08-P	Closed Horizontal Male Header Of 5.08 mm Pitch available in 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

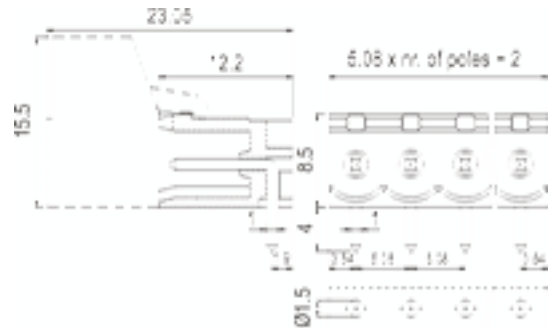

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

PIXX-5.08



**Open Angular PCB Male Header In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Open Designs.
- 5) Orientation at 45 Deg with Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Angular Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	14.5 mm
Width (Thickness)	16.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PI02-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 2 Pole.	50
PI03-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 3 Pole.	50
PI04-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 4 Pole.	50
PI05-5.08	Open Angular Male Header Of 5.08 mm Pitch Available In 5 Pole.	50
PI06-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 6 Pole.	50
PI07-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 7 Pole.	50
PI08-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 8 Pole.	50
PI09-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 9 Pole.	50
PI10-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 10 Pole.	50
PI11-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 11 Pole.	50
PI12-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 12 Pole.	50
PI13-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 13 Pole.	50
PI14-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 14 Pole.	50
PI15-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 15 Pole.	50
PI16-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 16 Pole.	50
PI17-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 17 Pole.	50
PI18-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 18 Pole.	50
PI19-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 19 Pole.	50
PI20-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 20 Pole.	50
PI21-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 21 Pole.	50
PI22-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 22 Pole.	50
PI23-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 23 Pole.	50
PI24-5.08	Open Angular Male Header Of 5.08 mm Pich Available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

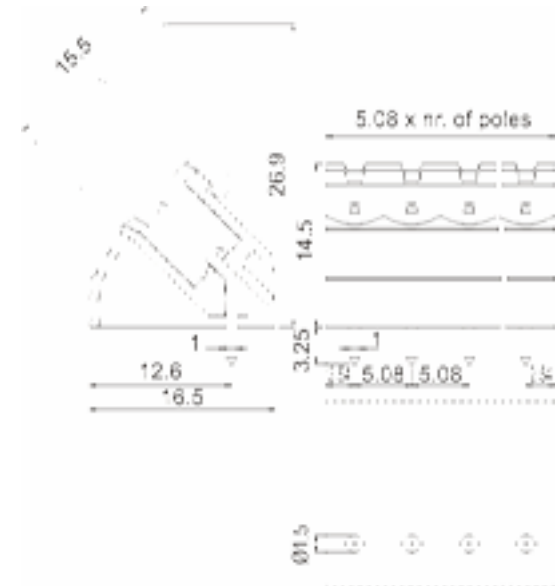

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	450 V
Rated Current	12 A	16 A

**PIXX-5.08-P**



**Closed Angular PCB Male Headers In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating: 16 amp.
- 4) Available in Closed Designs.
- 5) Orientation at 45 Deg with Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Angular Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	14.5 mm
Width (Thickness)	16.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PI02-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 2 Pole.	50
PI03-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 3 Pole.	50
PI04-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 4 Pole.	50
PI05-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 5 Pole.	50
PI06-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 6 Pole.	50
PI07-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 7 Pole.	50
PI08-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 8 Pole.	50
PI09-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 9 Pole.	50
PI10-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 10 Pole.	50
PI11-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 11 Pole.	50
PI12-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 12 Pole.	50
PI13-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 13 Pole.	50
PI14-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 14 Pole.	50
PI15-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 15 Pole.	50
PI16-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 16 Pole.	50
PI17-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 17 Pole.	50
PI18-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 18 Pole.	50
PI19-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 19 Pole.	50
PI20-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 20 Pole.	50
PI21-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 21 Pole.	50
PI22-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 22 Pole.	50
PI23-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 23 Pole.	50
PI24-5.08-P	Closed Angular Male Header Of 5.08 mm Pich Available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

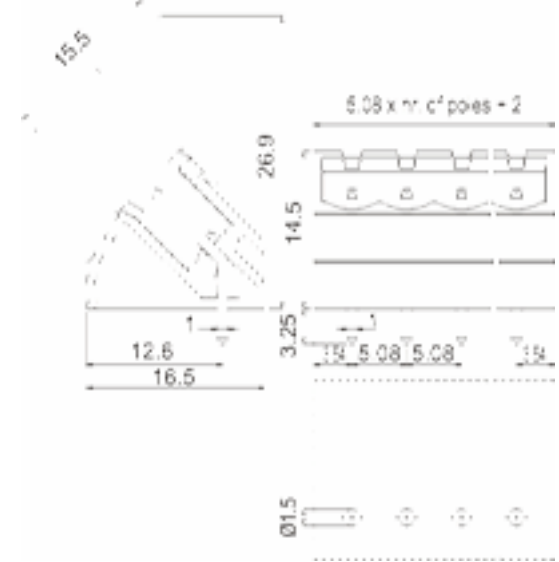



## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	
Rated Voltage	300 V	450 V
Rated Current	12 A	16 A

PVXX-5.08



**Open Vertical PCB Male Header in 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating : 16 amp.
- 4) Available in Open Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

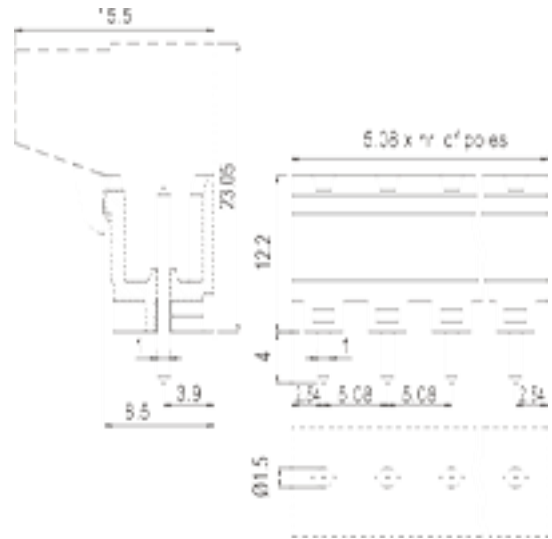

**DIMENSIONS**

Height	12.2 mm
Width (Thickness)	8.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 02 Pole.	50
PV03-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 03 Pole.	50
PV04-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 04 Pole.	50
PV05-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 05 Pole.	50
PV06-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 06 Pole.	50
PV07-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 07 Pole.	50
PV08-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 08 Pole.	50
PV09-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 09 Pole.	50
PV10-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 10 Pole.	50
PV11-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 11 Pole.	50
PV12-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 12 Pole.	50
PV13-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 13 Pole.	50
PV14-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 14 Pole.	50
PV15-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 15 Pole.	50
PV16-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 16 Pole.	50
PV17-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 17 Pole.	50
PV18-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 18 Pole.	50
PV19-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 19 Pole.	50
PV20-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 20 Pole.	50
PV21-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 21 Pole.	50
PV22-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 22 Pole.	50
PV23-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 23 Pole.	50
PV24-5.08	Open Vertical Male Header Of 5.08 mm Pitch available In 24 Pole.	50

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A

PVXX-5.08-P



**Closed Vertical PCB Male Header In 5.08 mm Pitch**

- 1) Available in 2 to 24 Pole design.
- 2) Suitable For 5.08 mm Pitch PCB Connection.
- 3) Current Rating is 16 amp.
- 4) Available in Closed Designs.
- 5) Vertical Orientation With Respect To PCB.

**TECHNICAL DATA**

Pin Spacing	5.08 mm
Rated Voltage	300 V
Rated Current	12 A
Housing Material	Polyamide
Standard Colour	Green
Type of Connection	Not Applicable
Product Function	Vertical Male Headers for PCB
Number of Poles	2 to 24
PCB Hole Size Diameter	1.5 mm
Mounting Possibility	PCB

**DIMENSIONS**

Height	12.2 mm
Width (Thickness)	8.5 mm

**APPROVALS**



**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	STD. PACK
PV02-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 02 Pole.	50
PV03-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 03 Pole.	50
PV04-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 04 Pole.	50
PV05-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 05 Pole.	50
PV06-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 06 Pole.	50
PV07-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 07 Pole.	50
PV08-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 08 Pole.	50
PV09-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 09 Pole.	50
PV10-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 10 Pole.	50
PV11-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 11 Pole.	50
PV12-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 12 Pole.	50
PV13-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 13 Pole.	50
PV14-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 14 Pole.	50
PV15-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 15 Pole.	50
PV16-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 16 Pole.	50
PV17-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 17 Pole.	50
PV18-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 18 Pole.	50
PV19-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 19 Pole.	50
PV20-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 20 Pole.	50
PV21-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 21 Pole.	50
PV22-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 22 Pole.	50
PV23-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 23 Pole.	50
PV24-5.08-P	Closed Vertical Male Header Of 5.08 mm Pitch available In 24 Pole.	50


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	LBL/5.08/XX	Marking Tags for PCB Terminal Blocks of 5.08 mm Pitch from 2 to 24 Poles	50

**NOTES**

Available in 2 to 24 Pole.

**PRODUCT DIAGRAM**

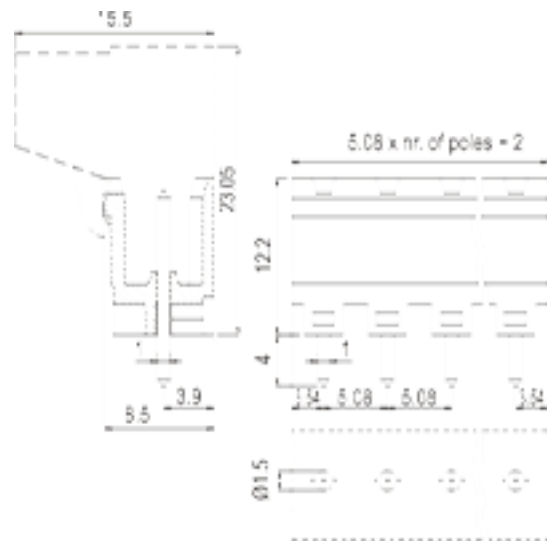

## RATINGS AS PER STANDARDS

STANDARDS	UL 1059	EN61984
Approvals	UL	VDE
Rated Voltage	300 V	250 V
Rated Current	12 A	12 A