


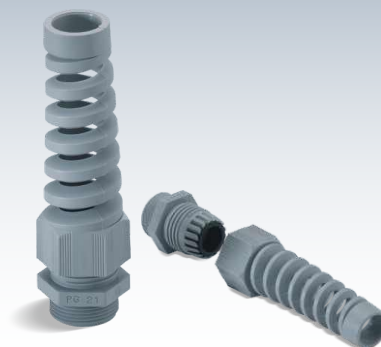




Spiral Cable Glands offer maximum protection against conductor fatigue caused by flexing cables. Designed for kink protection and mainly used for moving machine assemblies.

Technical Details :	
Material	Polyamide 6
Colour	RAL 7001 (Grey) RAL 9005 (Black)
Protection Class	IP 68, 5 bar
Sealing Ring	Neoprene
Temperature Range	-30° C to +80° C Continuous, +150° C Intermittent
Threads available	Pg, Metric. For NPT Threads contact Controlwell
Approvals	  

## SPIRAL CABLE GLANDS



### Pg Thread

Size	Cat. No. Grey	Cat. No. Black	Standard Pack (pieces)	Thread Diameter (mm)	Thread Length (mm)	Wrench (mm)	Clamping Range (mm)
Pg 7	BSSP-01	BSSP-21	100	13	8	15	3 - 6.5
Pg 9	BSSP-02	BSSP-22	50	16	8	19	4 - 8
Pg 11	BSSP-03	BSSP-23	50	19	8	22	5 - 10
Pg 13.5	BSSP-04	BSSP-24	50	21	9	24	6 - 12
Pg 16	BSSP-05	BSSP-25	50	23	10	27	10 - 14
Pg 21	BSSP-06	BSSP-26	25	29	11	33	13 - 18

### Metric Thread

Size	Cat. No. Grey	Cat. No. Black	Standard Pack (pieces)	Thread Diameter (mm)	Thread Length (mm)	Wrench (mm)	Clamping Range (mm)
M 12 x 1.5	BMSP-0S	BMSP-2S	50	12	8	15	3 - 6.5
M 16 x 1.5	BMSP-01	BMSP-21	50	16	10	22	5 - 10
M 20 x 1.5	BMSP-02	BMSP-22	20	20	10	24	6 - 12
M 20 x 1.5	BMSP-03	BMSP-23	20	20	10	27	10 - 14
M 25 x 1.5	BMSP-05	BMSP-25	20	25	10	33	13 - 18